




Arsenic Filters Series 5600

Arsenic is an extremely harmful contaminant found in ground water and in wells. It is usually found near mining operations or from runoff from agricultural areas. ATS Arsenic Filters eliminates the Arsenic and provides safe water.



- **Standard Bypass Valve allows for ease of installation & service**
- **High Flow Distribution System**
- **Automatic 12 Day Control Valve**
- **Polyglass Mineral Tank NSF Approved**

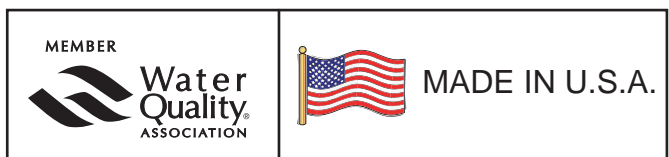

Providing Better Water For Better Living.


Arsenic Filters Series 5600

SPECIFICATIONS							
Model #	Mineral Tank Size	Cu./ Ft.	Service Flow	Backwash Rate	Pipe Size		
AFA5600-2	10" x 54"	1.0	5 gpm	5 gpm	3/4"		
Std. Media	Salt Lbs./ Reg.	- *OPERATING CONDITIONS -					
Nitrate Resin	Reg.	Max. Nit./Sult.	pH	Manganese	Iron	Sulfur	Turbidity
Anion Resin	15	See Note	6.8 - 8.8	.05 ppm	.1 ppm	.1 ppm	120 NTU

*This system requires a thorough water analysis. Capacity of unit should be calculated. Consult with a customer service representative. Water may need to be treated prior to arsenic removal.

NOTE

All Arsenic Systems should have two filters in series. In addition, complete applications should include: Feed Pump, Solution Tank, and a Contact Tank. All units are standard with 3/4" inlet/outlet.

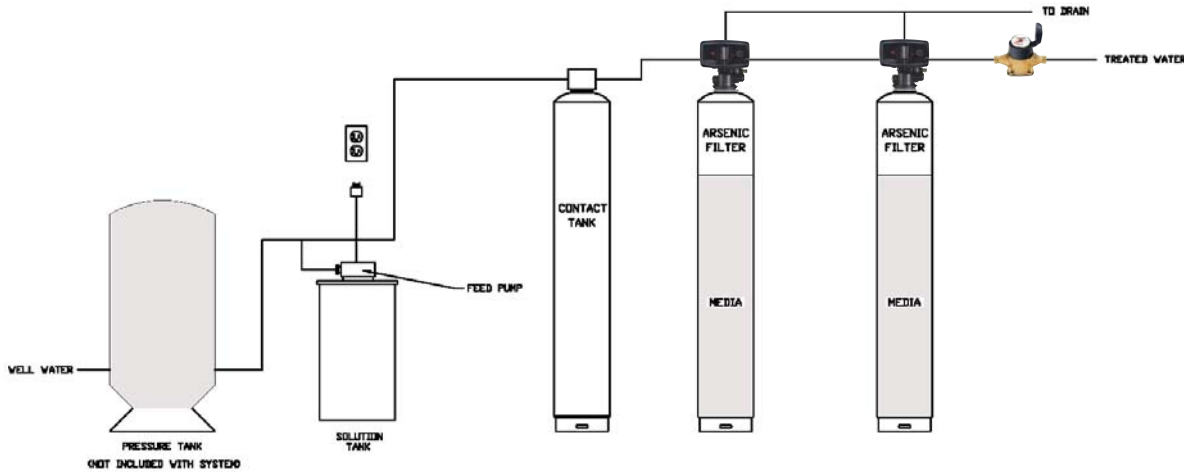

5600 valve

Controls are Easy to Use

Choice of a 12 Day Clock or Meter Regeneration

Energy Consumption is Very Low

Proven Reliability, Compact & Easy to Install

• OPTIONS

ATS-MJ05 Meter with 3/4" Connections

