




Greensand Filters Series 255

The ATS Greensand Filter is a proven system, when it comes to reducing iron, manganese, & hydrogen sulfide through oxidation and filtration.



- **Long Life Media**
- **Non-Corrosive Fiberglass Mineral Tank**
- **Automatic 6 or 7 Day Control Valve**
- **Filter Bypass**
- **High Flow Distribution System**

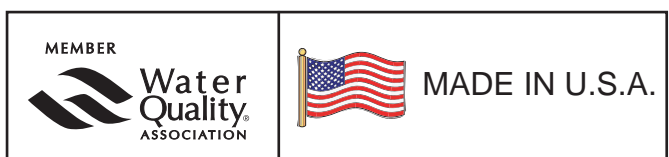

Providing Better Water For Better Living.

Greensand Filters Series 255

SPECIFICATIONS						
Model #	Mineral Tank Size	Cu./ Ft.	Service Flow	Backwash Rate	Pipe Size	Max. Pressure
AF255FA-2	10" x 54"	1.5	5 gpm	5 gpm	3/4"	125 psi
Model #	Potassium Tank Size	Standard Media	- *OPERATING CONDITIONS -			
			pH	Sulfur	Iron	Turbidity
AF255FA-2	10" x 16"	MB775	6.8 - 8.8	10 ppm	10 ppm	120 NTU

* Where influent water pH is below 6.8, an Acid Neutralizer will be required.

NOTE

All units are standard with 3/4" inlet/outlet bypass.

Specify 1" COPPER or PVC connections when required on any filters.



255 valve

Five-Cycle Duraflow Valve-Disc Technology

Locking Bar Allows Easy Removal of all Serviceable Parts

Clear-sight Air Check & Large Injector Screens & Caps

Longevity in a Proven Design

