

*A Chemical Free Iron Removal  
And pH Neutralizing System From Hydroflo*




**T**he **OXFLO 10P** has been designed to facilitate the removal of high concentrations of iron and suspended particulate matter. An exclusive blend of minerals is used for the actual removal process. The unit consists of an air pump which precipitates soluble iron. The excess air is vented through the air-off tank and the precipitated iron gets filtered.

The OXFLO 10P requires no costly chemicals or filter media changes. Iron and suspended particulate matter are flushed weekly from the tank, using only water.

### Features Include:

- 💧 Non-Corrosive poly mineral tank.
- 💧 Six Day Controller—easily programmed to family demands guest switch for extra demand.
- 💧 Automatic Bypass—water available even during regeneration.
- 💧 Top Quality Long Life Media.

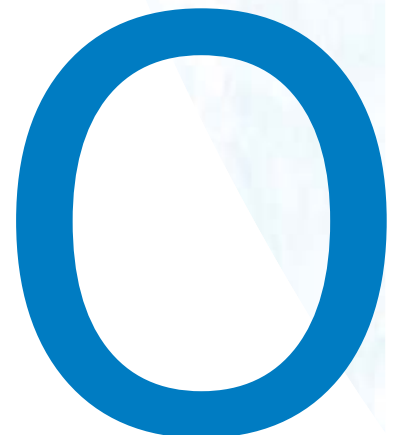

*Live Better With A HYDROFLO  
OXFLO 10P High Iron Removal System*

---



OxFlo 10P Control

A 3 cycle filter control with a backwash, purge and service cycle. Eliminating steps not needed in filters requiring backwash only.



1256 Noryl Bypass is included



Air Pump

---

**Specifications**

**OXFLO 10P**

Mineral (Cu. Ft./Lbs.)	1.5/70
Mineral Tank Size	10" x 54"
Service Flow (gpm)	5
Backwash Rate (gpm)	5.0
Pipe Size	3/4"
Max. Pressure (psi)	125
Max. Temperature, F°	100°
<b>Maximum Concentration Limits</b>	
Iron (ppm) *	10
H2S (ppm) *	2
pH	6.8 - 7.2
Turbidity (ppm)	125

Oxflo 10P may require rebedding at periodic intervals.

\* Excludes iron or sulphur bacterias.