


*A Quality Water Conditioner
from Hydroflo*



Features Include:

- Non-Corrosive—poly mineral tank, thermo plastic brine tank.
- Noryl valve reinforced with fiberglass.
- Six Day Controller—easily programmed to family demands—guest switch for extra demand.
- Automatic Bypass—water available even during regeneration.
- High Capacity resin.
- High Flow Distribution System.

HS

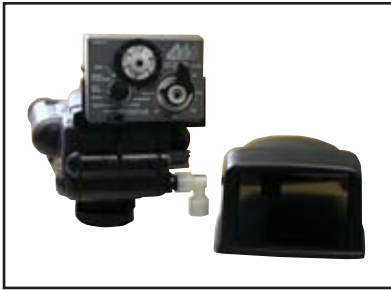

T'T Control



1256 Noryl Bypass is included

Specifications

HS-TT2

HS-TT3

Grains Capacity Max./Min.	64,000/40,000	96,000/60,000
Mineral (Cu. Ft.)	2	3
Mineral Tank Size	12" x 48"	14" x 65"
Brine Tank Size	18" x 33"	24" x 41"
Brine Tank Capacity (Lbs.)	375	700
Salt Lbs. Per Regeneration Max./Min.	37/12	55.5/18
Service Flow (gpm)	14	21
Backwash Rate (gpm)	3.5	5.0
Max. Pressure Drop (psi)	10	10
Pipe Size	1"	1"
Max. Pressure (psi)	125	125
Max. Temperature, F°	100°	100°
Floor Space	20" x 25"	20" x 30"