




AEROMAX - C SERIES

Iron, Sulfur Filters Series 7000

The ATS Iron, Sulfur Filter series remove iron and iron staining while controlling "rotten egg smell."



- *Chemical Free System*
- *Oil Free Air Pump*
- *Air Elimination Tank*
- *Long Life Media*
- *Manual Bypass*
- *High Flow Distribution System*
- *Automatic 12 Day Control Valve*
- *Polyglass Mineral Tank NSF Approved*

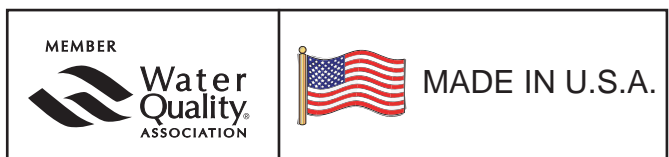

Providing Better Water For Better Living.

Iron, Sulfur Filters Series 7000

SPECIFICATIONS

Model #	Mineral Tank Size	Cu./ Ft.	Service Flow	Backwash Rate	Pipe Size	Max. Pressure
APF7000-2-1	10" x 54"	1.5	5 gpm	5 gpm	3/4"	125 psi
APF7000-2-2	10" x 54"	1.5	5 gpm	5 gpm	3/4"	125 psi
APF7000-2C	10" x 54"	1.5	5 gpm	5 gpm	3/4"	125 psi

Model #	Standard Media	Pump Voltage	- *OPERATING CONDITIONS -				
			pH	Sulfur	Iron	Turbidity	Dissolved O ²
APF7000-2-1	MB800	110V	6.8 - 8.5	2 ppm	10 ppm	120 NTU	15% Fe, Mn ppm
APF7000-2-2	MB800	220V	6.8 - 8.5	2 ppm	10 ppm	120 NTU	15% Fe, Mn ppm
APF7000-2C	MB800	110V	6.8 - 8.5	2 ppm	10 ppm	120 NTU	15% Fe, Mn ppm

* Where influent water pH is below 6.8, use AF263-2D with Neutralite A8001 or MB700 media. Consult a customer service representative on media selections.

NOTE

Filter standard with AIR PUMP, 3/4" BYPASS, MEDIA and AEROMAX.
All units are standard with 3/4" inlet/outlet.

APF7000-2C

- 120 vac Plug in Operation
- No Wiring to Well Pump Switch
- Non-Mechanical Flow Sensor
- One Control Box for System
- Works on All Well Systems



Air Pump



Control Box



Flow Sensor

SYSTEM DIAGRAM

