




Low Profile Softener

The ATS Low Profile Softener provides soft, conditioned hot water without the large size of traditional systems.



- *Limited Lifetime Warranty*
- *Stainless Steel Tank*
- *12 Day Time Clock*
- *Brass Valve Body*
- *Superior High Capacity Resin*
- *Standard Bypass Valve Allows for Ease of Installation and Service*
- *Brine Tank with Safety Float*

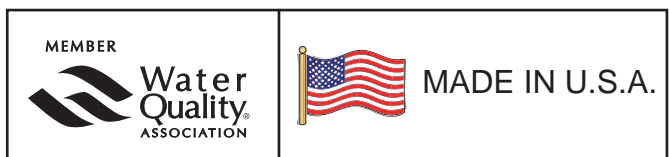

Providing Better Water For Better Living.

Low Profile Softener

SPECIFICATIONS

Model# Meter	Service Flow GPM	Brine Tank (Lbs.)	Salt Per		Pipe Size	Tank Size	Min. Grains Capacity	Max . Grains Capacity	Shipping Weight
			Min.	Max.					
TT4650-1LP	2.5	275	3	7	3/4" std.	8.5" x 18"	10,000	15,000	55 Lbs.
TT4650-3LP	5	275	6	15	3/4" std.	12" x 18"	20,000	30,000	70 Lbs.

NOTES:

Units standard with 3/4" bypass. Request 1" connection when ordering if needed. Specifications designed for optimal performance. Add approximately 6 inches to tank size to reach overall dimensions.

- This unit will increase soap & detergent effectiveness, all while eliminating soap curd that can cause spotting on glasses, dishes, & silverware.

4650 BENEFITS



Softer, Fluffier Clothes



*Save on Plumbing
Fixtures & Repairs*



*Use Less Soaps and
Detergents*



*Skin stays naturally
smooth; hair silky clean*

