




Softeners Series 2510

The ATS Series 2510 Softeners saves you money on soaps, detergents, plumbing fixtures and repairs; while providing softer, fluffier clothes, and smoother skin and hair.



- ***Automatic 12 Day Control Valve or Demand Initiated Control Valve***
- ***Standard Bypass Valve allows for ease of installation & service***
- ***High Capacity Resin***
- ***Durable Polyethylene Salt Storage Tank***
- ***Polyglass Mineral Tank NSF Approved***
- ***High Flow Distribution System***
- ***Easy Access Brine Lid***
- ***Brine Tank Safety Float System***

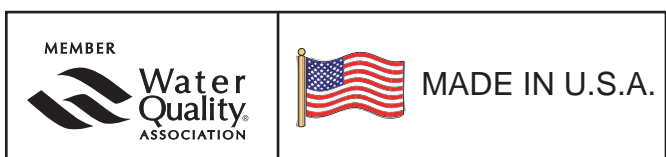

Providing Better Water For Better Living.

Softeners Series 2510

2510 BENEFITS



Softer, Fluffier Clothes



*Save on Plumbing
Fixtures & Repairs*



*Use Less Soaps and
Detergents*



*Skin stays naturally
smooth; hair silky clean*

SPECIFICATIONS

Model #	Ser. Fl. GPM	Br. Tank Lbs.	Salt Per.		Pipe Size	Tank Size	Grains Cap.		Wt. Lbs.
			Min.	Max.			Min.	Max.	
TT2510-2	6	275	5	12	3/4" std.	8" x 40"	15,000	24,000	89 lbs.
TT2510-3	8	275	6	18.5	3/4" std.	10" x 40"	20,000	32,000	102 lbs.
TT2510-5	9	275	9	28	3/4" std.	10" x 54"	30,000	48,000	140 lbs.
TT2510-6	10	275	12	37	3/4" std.	12" x 52"	40,000	64,000	165 lbs.
TT2510M-2	6	275	5	12	3/4" std.	8" x 40"	15,000	24,000	89 lbs.
TT2510M-3	8	275	6	18.5	3/4" std.	10" x 40"	20,000	32,000	102 lbs.
TT2510M-5	9	275	9	28	3/4" std.	10" x 54"	30,000	48,000	140 lbs.
TT2510M-6	10	275	12	37	3/4" std.	12" x 52"	40,000	64,000	165 lbs.

• OPTIONS

- H1071-02 SALT GRID
- S6304 RESUP FEEDER (12 cc) Yellow
- S6305 RESUP FEEDER (30 cc) Clear

NOTE

Units standard with 3/4" inlet/outlet, bypass and safety brine float. Series 2510 Softeners standard with 3/4" bypass and 12 day timer. "M" indicates meter unit.



2510 valve

Adjustable 5-cycle Top Mount Control

Choice of a 12 Day Clock or Demand Regeneration

Outstanding Flow Rates - 19 GPM Continuous, 24 GPM Peak

Backwash Capacity Handles Tanks up to 16" Diameter